




**Armstrong**Flooring™

**Medintech plus®  
collection**

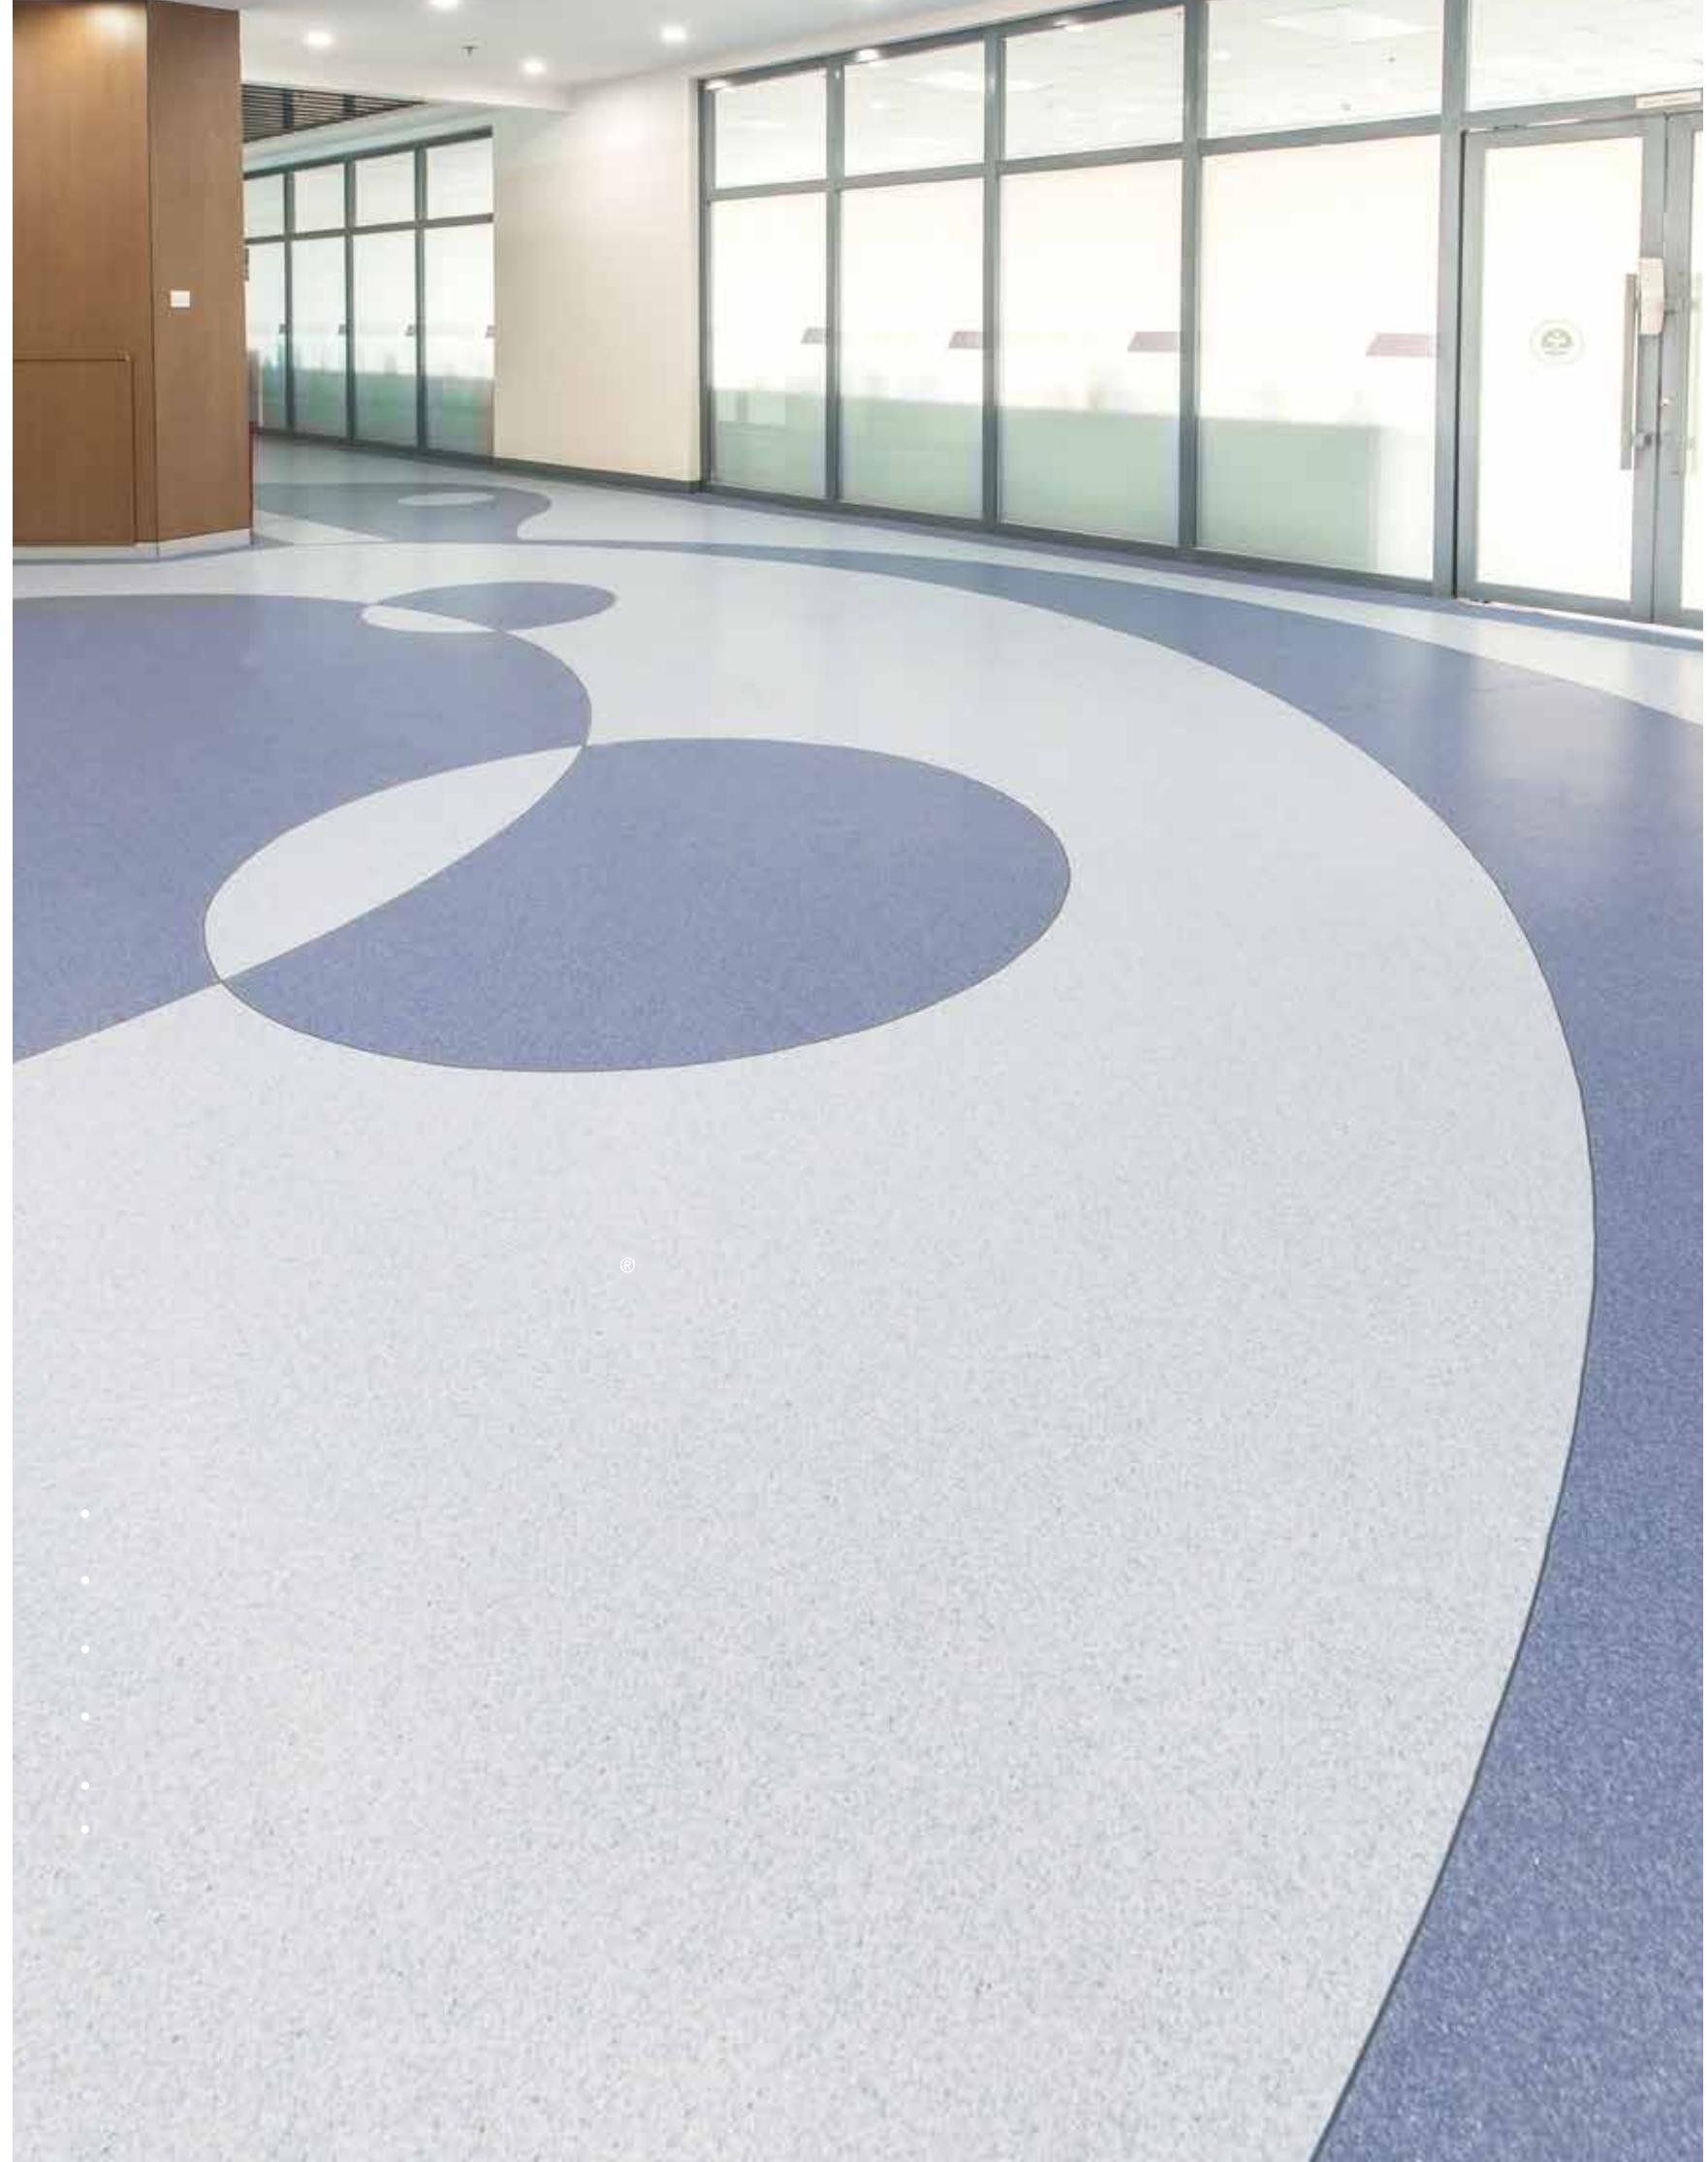

**Medintech plus® collection**

Diamond 10™ Coated Homogeneous Sheet

**ArmstrongFlooring™**

198\*226

400 m<sup>2</sup>

K811A-629  
\* F811A-629Y

Blue skies

Product marked with \*\* has special MOQ and delivery requirements.  
Please consult the company's customer service department or local  
sales for details.

# Medintech plus® collection

Diamond 10™ Coated Homogeneous Sheet

ArmstrongFlooring™



2.0mm Medintech Plus: K811A-xxx  
4.0mm Medintech Plus Acoustic: F811A-xxxY

45\*45

K811A-318  
\* F811A-318Y

Orange zest

\* K811A-317  
\* F811A-317Y

Orange

Orange

K811A-331  
\* F811A-331Y

Banana

K811A-316  
\* F811A-316Y

Cream

\* K811A-435  
\* F811A-435Y

Rouge

\* K811A-422  
\* F811A-422Y

Monarch red

\* K811A-421  
\* F811A-421Y

Coral


K811A-215  
\* F811A-215Y

Sandalwood



K811A-108  
\* F811A-108Y

Pumice stone



K811A-005  
\* F811A-005Y



\* K811A-109  
\* F811A-109Y

Purple ore



\* K811A-734  
\* F811A-734Y

Wisteria

Product marked with \*\*\* has special MOQ and delivery requirements.  
Please consult the company's customer service department or local sales for details.

## Medintech plus® collection

Diamond 10™ Coated Homogeneous Sheet

**Armstrong** Flooring™



2.0mm Medintech Plus: K811A-xxx

4.0mm Medintech Plus Acoustic: F811A-xxxY



K811A-216  
\* F811A-216Y



K811A-213  
\* F811A-213Y



K811A-211  
\* F811A-211Y



K811A-212  
\* F811A-212Y



\* K811A-419  
\* F811A-419Y



\* K811A-420  
\* F811A-420Y



K811A-107  
\* F811A-107Y



K811A-214  
\* F811A-214Y



K811A-210  
\* F811A-210Y



K811A-002  
\* F811A-002Y



K811A-001  
\* F811A-001Y



K811A-106  
\* F811A-106Y

Product marked with \*\*\* has special MOQ and delivery requirements.  
Please consult the company's customer service department or local sales for details.

# Medintech plus® collection

Diamond 10™ Coated Homogeneous Sheet

ArmstrongFlooring™




2.0mm Medintech Plus: K811A-xxx  
4.0mm Medintech Plus Acoustic: F811A-xxxY

Medintech Plus Acoustic



K811A-628  
\* F811A-628Y



K811A-630  
\* F811A-630Y




K811A-533  
\* F811A-533Y



K811A-526  
\* F811A-526Y




K811A-532  
\* F811A-532Y

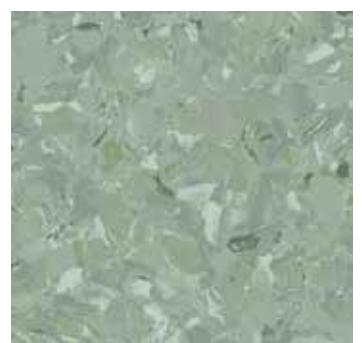

\* K811A-525  
\* F811A-525Y



K811A-524  
\* F811A-524Y



K811A-004  
\* F811A-004Y



K811A-003  
\* F811A-003Y



K811A-523  
\* F811A-523Y



K811A-627  
\* F811A-627Y

Product marked with \*\*\* has special MOQ and delivery requirements.  
Please consult the company's customer service department or local sales for details.

Authentic identification: All Armstrong flooring products have unique identity authentication.



#### Tough as Diamond

- Unique formulation with industrial diamond
- More compacted and tougher coating to protect the vinyl flooring



#### Easy to Clean

- Water/oil-based pollutants are difficult to penetrate into flooring
- More economic and quicker cleaning maintenance



#### More Durable

- Superb anti-scratching capability
- Double the average coating thickness of competitors
- Excellent user experience in durability



#### Chemical Resistance

- Prevent kinds of medicament and strong acid/alkali from damage to flooring
- Tolerate to daily repeated detergent treatment

Technical Data		2.0mm Medintech Plus		4.0mm Medintech Plus Acoustic
Characteristics	Standard	Unit	Result	Result
Type of flooring	ISO 10581-EN 649		Homogeneous Sheet	-
Material			Polyvinyl chloride	Polyvinyl chloride
Coating			Diamond 10™	Diamond 10™
Safety criteria				
Flammability	GB 8624-2012	class	B1	B1
Flammability	EN 13501-1	class	Bfl	Bfl
Slip resistance	DIN 51130 / EN DIN 16165	group	R9	R9
Dynamic coefficient of friction	EN 13893 / EN 14041	class	DS	DS
Performance behaviour				
Sheet width	ISO 24341-EN 426	m	2	2
Sheet length	ISO 24341-EN 426	m	15/20	15/20
Overall thickness	ISO 24346-EN 428	mm	2.0	4.0
Wearlayer thickness	ISO 24390-EN 429	mm	2.0	2.0
Total weight	ISO 23997-EN 430	kg/m²	2.8	4.0
Wear resistance	EN 649	group	T	T
Binder content	EN ISO10581	Type	Type1	-
Residual indentation	ISO 24343-1-EN433	mm	0.03	< 0.1
Dimensional stability	ISO 23999-EN 434	-	X :<0.4% Y :<0.4%	X :<0.4% Y :<0.4%
Impact sound insulation	EN ISO 717-2	dB	3	17
Color fastness	ISO 105-B02	rating	≥6	≥6
Resistance to staining	EN 423		No Stain 0	No Stain 0
Classification				
Domestic	ISO 10874-EN 685	class	23 heavy duty	
Commercial	ISO 10874-EN 685	class	34 very heavy duty	
Industrial	ISO 10874-EN 685	class	43 heavy duty	
Additional property				
Castor Chair 	✓	Antistatic Behaviour 	✓	
Underfloor Heating 	✓	Chemical Resistance 	✓	
 No DOP detected	 No heavy metal detected according to standard for children's toys	 The detection value of formaldehyde emission is 0	 No high-risk carcinogens detected	 Release in 28 days <5 µg/m³



Official Website of the Company: [www.armstrongflooring.cn](http://www.armstrongflooring.cn)  
 Product Consultation Hotline: 400-606-0866

YS-SF-Sidecar -0222-PRC Printed in China

The above information is for reference only. The company has the right to modify the above information at any time. The company reserves all legal rights and the right of final interpretation for all the contents in this sample.